


Vandex® Below Ground Concrete Block Wall and Slab / External Waterproofing

SCOPE: External waterproofing of concrete block wall / brick wall and slab structures not subject to hydrostatic pressure.

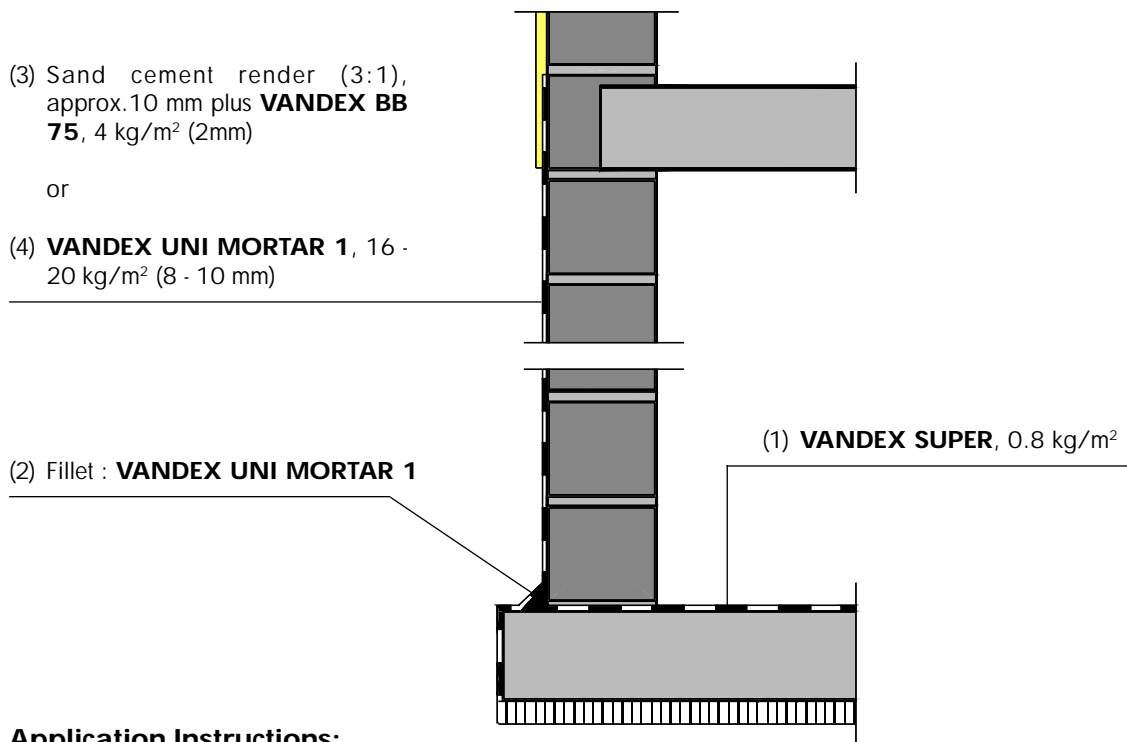

Application Instructions:

- 1.) Apply one coat of VANDEX SUPER, at the rate of 0.8 kg/m² to the slab surface.
 - 2.) Apply a cove fillet of VANDEX UNI MORTAR 1 at the slab/wall junction.
 - 3.) To the vertical surface apply a sand-cement render (3:1) to a thickness of approx. 10 mm. On top of the roughened surface apply one coat of VANDEX BB 75, at the rate of 4 kg/m² (2 mm).
- or
- 4.) Apply a single layer VANDEX UNI MORTAR 1, at the rate of 16 - 20 kg/m² (8 - 10 mm)

The information contained herein is based on our longterm experience and the best of our knowledge. We can, however, make no guarantee since for a successful outcome, all circumstances in an individual case must be taken into consideration. Indications of quantities required are only averages which in certain cases might be greater.

Vandex

QUALITY
ISO 9001
CERTIFIED

CONCRETE PROTECTION AND WATERPROOFING

HEADOFFICE AND INTERNATIONAL SALES:
VANDEX INTERNATIONAL LTD
P.O. Box, CH-4501 Solothurn/Switzerland
Phone: +41 (0)32 626 36 36, Fax +41 (0)32 626 36 37
E-mail: vandex@vandex.com www.vandex.com

PRODUCTION AND SALES GERMANY:
VANDEX ISOLIERMITTEL-GESELLSCHAFT m.b.H.
Postfach 1406, D-21487 Schwarzenbek/Germany
Phone: +49 (0)4151 89 15-0, Fax +49 (0)4151 89 15 50
E-mail: vandex@vandex.de www.vandex.de

SALES U.K.:
VANDEX (UK) LTD
P. O. Box 200, Guildford, Surrey GU2 4WD/United Kingdom
Phone: 0870 241 6264, Fax: 0870 241 6274
E-mail: info@vandex.co.uk www.vandex.co.uk

VXIS1.9E023