


The choice of a specific product will depend on the applied chemical and mechanical stress.
For further information, please contact the Vandex International Ltd. Technical Department

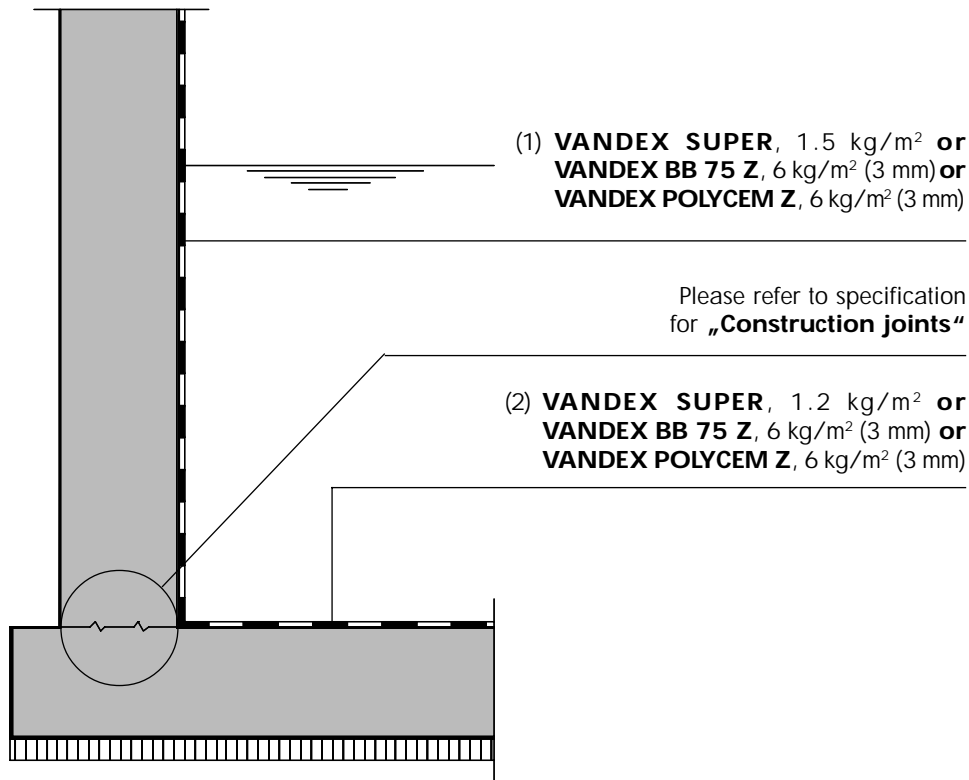

Application Instructions:

- 1.) For all vertical surfaces apply two coats VANDEX SUPER, at the total rate of 1.5 kg/m² or alternatively two coats of VANDEX BB 75 Z/VANDEX POLYCEM Z, at the total rate of 6 kg/m² (3 mm), where a particularly smooth surface is required.
- 2.) Apply one coat of VANDEX SUPER, at the rate of 1.2 kg/m², or alternatively two coats of VANDEX BB 75 Z/VANDEX POLYCEM Z, at the total rate of 6 kg/m² (3mm), where a particularly smooth surface is required.

The information contained herein is based on our longterm experience and the best of our knowledge. We can, however, make no guarantee since for a successful outcome, all circumstances in an individual case must be taken into consideration. Indications of quantities required are only averages which in certain cases might be greater.